



















Precision Ground Plates and Flat Bars



Contents

	2900. Steel plate ISO 6753-1	B6		2923.2363. Precision flat and square bar steel with machining allowance, DIN 59350	B14
	2910. Aluminium plate ~ISO 6753-1	B7		2923.2379. Precision flat and square bar steel with machining allowance, DIN 59350	B15
	2922.1730. Precision flat and square bar steel, ~DIN 59350	B8		2923.2436. Precision flat and square bar steel with machining allowance, DIN 59350	B16
	2923.0570. Precision flat and square bar steel with machining allowance, DIN 59350	B9		2923.2767. Precision flat and square bar steel with machining allowance, DIN 59350	B17
	2923.2099. Precision flat and square bar steel with machining allowance, DIN 59350	B10		2922.2842. Precision flat and square bar steel, DIN 59350	B18
	2923.2162. Precision flat and square bar steel with machining allowance, DIN 59350	B11		2923.2842. Precision flat and square bar steel with machining allowance, DIN 59350	B19
	2923.2312. Precision flat and square bar steel with machining allowance, DIN 59350	B12		2925. Precision feeler gauge	B20
	2923.2343. Precision flat and square bar steel with machining allowance, DIN 59350	B13			

2900.

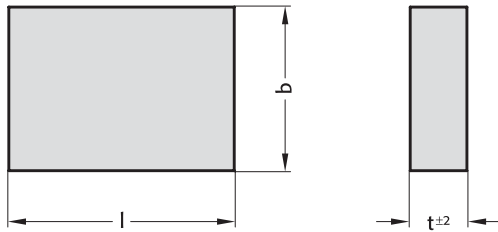

Execution:

External contours milled. Thickness surfaces ground

Note:

l or b ≤ 630 = +0,2 / +0,4

l or b > 630 = +0,2 / +0,6

Plates from 500 × 500 mm on are manufactured with lifting thread.


2900. Steel plate ISO 6753-1

Order No	Size l x b x t	Order No	Size l x b x t	Order No	Size l x b x t
2900.1608.25	160 x 80 x 25	2900.3120.40	315 x 200 x 40	2900.6340.32	630 x 400 x 32
2900.1608.32	160 x 80 x 32	2900.3120.50	315 x 200 x 50	2900.6340.40	630 x 400 x 40
2900.1610.25	160 x 100 x 25	2900.3125.32	315 x 250 x 32	2900.6340.50	630 x 400 x 50
2900.1610.32	160 x 100 x 32	2900.3125.40	315 x 250 x 40	2900.6340.63	630 x 400 x 63
2900.1612.25	160 x 125 x 25	2900.3125.50	315 x 250 x 50	2900.6350.32	630 x 500 x 32
2900.1612.32	160 x 125 x 32	2900.3131.32	315 x 315 x 32	2900.6350.40	630 x 500 x 40
2900.1616.25	160 x 160 x 25	2900.3131.40	315 x 315 x 40	2900.6350.50	630 x 500 x 50
2900.1616.32	160 x 160 x 32	2900.3131.50	315 x 315 x 50	2900.6350.63	630 x 500 x 63
2900.2010.25	200 x 100 x 25	2900.4020.32	400 x 200 x 32	2900.6363.32	630 x 630 x 32
2900.2010.32	200 x 100 x 32	2900.4020.40	400 x 200 x 40	2900.6363.40	630 x 630 x 40
2900.2010.40	200 x 100 x 40	2900.4020.50	400 x 200 x 50	2900.6363.50	630 x 630 x 50
2900.2012.25	200 x 125 x 25	2900.4025.32	400 x 250 x 32	2900.6363.63	630 x 630 x 63
2900.2012.32	200 x 125 x 32	2900.4025.40	400 x 250 x 40	2900.7140.32	710 x 400 x 32
2900.2012.40	200 x 125 x 40	2900.4025.50	400 x 250 x 50	2900.7140.40	710 x 400 x 40
2900.2016.25	200 x 160 x 25	2900.4031.32	400 x 315 x 32	2900.7140.50	710 x 400 x 50
2900.2016.32	200 x 160 x 32	2900.4031.40	400 x 315 x 40	2900.7140.63	710 x 400 x 63
2900.2016.40	200 x 160 x 40	2900.4031.50	400 x 315 x 50	2900.7150.32	710 x 500 x 32
2900.2020.25	200 x 200 x 25	2900.4040.32	400 x 400 x 32	2900.7150.40	710 x 500 x 40
2900.2020.32	200 x 200 x 32	2900.4040.40	400 x 400 x 40	2900.7150.50	710 x 500 x 50
2900.2020.40	200 x 200 x 40	2900.4040.50	400 x 400 x 50	2900.7150.63	710 x 500 x 63
2900.2512.25	250 x 125 x 25	2900.5025.32	500 x 250 x 32	2900.7163.32	710 x 630 x 32
2900.2512.32	250 x 125 x 32	2900.5025.40	500 x 250 x 40	2900.7163.40	710 x 630 x 40
2900.2512.40	250 x 125 x 40	2900.5025.50	500 x 250 x 50	2900.7163.50	710 x 630 x 50
2900.2516.25	250 x 160 x 25	2900.5031.32	500 x 315 x 32	2900.7163.63	710 x 630 x 63
2900.2516.32	250 x 160 x 32	2900.5031.40	500 x 315 x 40	2900.8040.32	800 x 400 x 32
2900.2516.40	250 x 160 x 40	2900.5031.50	500 x 315 x 50	2900.8040.40	800 x 400 x 40
2900.2520.25	250 x 200 x 25	2900.5040.32	500 x 400 x 32	2900.8040.50	800 x 400 x 50
2900.2520.32	250 x 200 x 32	2900.5040.40	500 x 400 x 40	2900.8040.63	800 x 400 x 63
2900.2520.40	250 x 200 x 40	2900.5040.50	500 x 400 x 50	2900.8050.32	800 x 500 x 32
2900.2525.25	250 x 250 x 25	2900.5050.32	500 x 500 x 32	2900.8050.40	800 x 500 x 40
2900.2525.32	250 x 250 x 32	2900.5050.40	500 x 500 x 40	2900.8050.50	800 x 500 x 50
2900.2525.40	250 x 250 x 40	2900.5050.50	500 x 500 x 50	2900.8050.63	800 x 500 x 63
2900.3116.32	315 x 160 x 32	2900.6331.32	630 x 315 x 32	2900.8063.32	800 x 630 x 32
2900.3116.40	315 x 160 x 40	2900.6331.40	630 x 315 x 40	2900.8063.40	800 x 630 x 40
2900.3116.50	315 x 160 x 50	2900.6331.50	630 x 315 x 50	2900.8063.50	800 x 630 x 50
2900.3120.32	315 x 200 x 32	2900.6331.63	630 x 315 x 63	2900.8063.63	800 x 630 x 63



Aluminium plate ~ISO 6753-1

2910..2

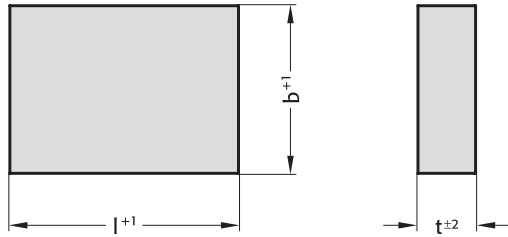

Execution:


2910.□□□□.□□.2

Two external contours milled. Thickness surfaces ground.

Note:

Plates from 500 × 500 mm on are manufactured with lifting thread.

2910..0

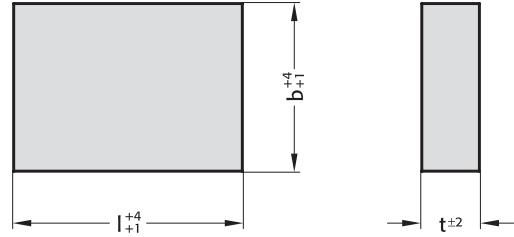

Execution:

2910.□□□□.□□.0

External contours sawed. Thickness surfaces ground.

Note:

Plates from 500 × 500 mm on are manufactured with lifting thread.

2910. Aluminium plate ~ISO 6753-1

Order No	Size l x b x t	Order No	Size l x b x t	Order No	Size l x b x t	Order No	Size l x b x t
2910.1608.25.□	160 x 80 x 25	2910.2520.32.□	250 x 200 x 32	2910.4040.40.□	400 x 400 x 40	2910.6363.40.□	630 x 630 x 40
2910.1608.32.□	160 x 80 x 32	2910.2520.40.□	250 x 200 x 40	2910.4040.50.□	400 x 400 x 50	2910.6363.50.□	630 x 630 x 50
2910.1610.25.□	160 x 100 x 25	2910.2525.25.□	250 x 250 x 25	2910.5025.32.□	500 x 250 x 32	2910.6363.63.□	630 x 630 x 63
2910.1610.32.□	160 x 100 x 32	2910.2525.32.□	250 x 250 x 32	2910.5025.40.□	500 x 250 x 40	2910.7140.32.□	710 x 400 x 32
2910.1612.25.□	160 x 125 x 25	2910.2525.40.□	250 x 250 x 40	2910.5025.50.□	500 x 250 x 50	2910.7140.40.□	710 x 400 x 40
2910.1612.32.□	160 x 125 x 32	2910.3116.32.□	315 x 160 x 32	2910.5031.32.□	500 x 315 x 32	2910.7140.50.□	710 x 400 x 50
2910.1616.25.□	160 x 160 x 25	2910.3116.40.□	315 x 160 x 40	2910.5031.40.□	500 x 315 x 40	2910.7140.63.□	710 x 400 x 63
2910.1616.32.□	160 x 160 x 32	2910.3116.50.□	315 x 160 x 50	2910.5031.50.□	500 x 315 x 50	2910.7150.32.□	710 x 500 x 32
2910.2010.25.□	200 x 100 x 25	2910.3120.32.□	315 x 200 x 32	2910.5040.32.□	500 x 400 x 32	2910.7150.40.□	710 x 500 x 40
2910.2010.32.□	200 x 100 x 32	2910.3120.40.□	315 x 200 x 40	2910.5040.40.□	500 x 400 x 40	2910.7150.50.□	710 x 500 x 50
2910.2010.40.□	200 x 100 x 40	2910.3120.50.□	315 x 200 x 50	2910.5040.50.□	500 x 400 x 50	2910.7150.63.□	710 x 500 x 63
2910.2012.25.□	200 x 125 x 25	2910.3125.32.□	315 x 250 x 32	2910.5050.32.□	500 x 500 x 32	2910.7163.32.□	710 x 630 x 32
2910.2012.32.□	200 x 125 x 32	2910.3125.40.□	315 x 250 x 40	2910.5050.40.□	500 x 500 x 40	2910.7163.40.□	710 x 630 x 40
2910.2012.40.□	200 x 125 x 40	2910.3125.50.□	315 x 250 x 50	2910.5050.50.□	500 x 500 x 50	2910.7163.50.□	710 x 630 x 50
2910.2016.25.□	200 x 160 x 25	2910.3131.32.□	315 x 315 x 32	2910.6331.32.□	630 x 315 x 32	2910.7163.63.□	710 x 630 x 63
2910.2016.32.□	200 x 160 x 32	2910.3131.40.□	315 x 315 x 40	2910.6331.40.□	630 x 315 x 40	2910.8040.32.□	800 x 400 x 32
2910.2016.40.□	200 x 160 x 40	2910.3131.50.□	315 x 315 x 50	2910.6331.50.□	630 x 315 x 50	2910.8040.40.□	800 x 400 x 40
2910.2020.25.□	200 x 200 x 25	2910.4020.32.□	400 x 200 x 32	2910.6331.63.□	630 x 315 x 63	2910.8040.50.□	800 x 400 x 50
2910.2020.32.□	200 x 200 x 32	2910.4020.40.□	400 x 200 x 40	2910.6340.32.□	630 x 400 x 32	2910.8040.63.□	800 x 400 x 63
2910.2020.40.□	200 x 200 x 40	2910.4020.50.□	400 x 200 x 50	2910.6340.40.□	630 x 400 x 40	2910.8050.32.□	800 x 500 x 32
2910.2512.25.□	250 x 125 x 25	2910.4025.32.□	400 x 250 x 32	2910.6340.50.□	630 x 400 x 50	2910.8050.40.□	800 x 500 x 40
2910.2512.32.□	250 x 125 x 32	2910.4025.40.□	400 x 250 x 40	2910.6340.63.□	630 x 400 x 63	2910.8050.50.□	800 x 500 x 50
2910.2512.40.□	250 x 125 x 40	2910.4025.50.□	400 x 250 x 50	2910.6350.32.□	630 x 500 x 32	2910.8050.63.□	800 x 500 x 63
2910.2516.25.□	250 x 160 x 25	2910.4031.32.□	400 x 315 x 32	2910.6350.40.□	630 x 500 x 40	2910.8063.32.□	800 x 630 x 32
2910.2516.32.□	250 x 160 x 32	2910.4031.40.□	400 x 315 x 40	2910.6350.50.□	630 x 500 x 50	2910.8063.40.□	800 x 630 x 40
2910.2516.40.□	250 x 160 x 40	2910.4031.50.□	400 x 315 x 50	2910.6350.63.□	630 x 500 x 63	2910.8063.50.□	800 x 630 x 50
2910.2520.25.□	250 x 200 x 25	2910.4040.32.□	400 x 400 x 32	2910.6363.32.□	630 x 630 x 32	2910.8063.63.□	800 x 630 x 63

Ordering Code (example):

Aluminium plate ~ISO 6753-1	= 2910.
Length L	160 mm = 16
Width B	80 mm = 08.
Thickness T	25 mm = 25.
Execution FORM	sawn = 0
Order No	= 2910.1608.25.0

Precision flat and square bar steel, ~DIN 59350




2922.1730.



Material:
1.1730 / C45U
Unalloyed tool steel

Execution:
Thickness precision ground, width ground or milled, length machined

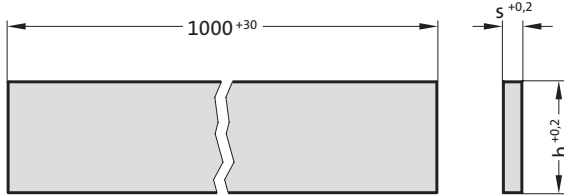

2922.1730. Precision flat and square bar steel, ~DIN 59350

s	4	5	6	8	10	12	15	16	20	25	30	32	40	50	60	63	70	80	100	120	150	
b																						
10					•																	
12						•																
15							•															
16								•														
20	•	•	•	•	•	•	•	•	•													
25	•	•	•	•	•	•	•	•	•	•												
30	•	•	•	•	•	•	•	•	•	•	•											
32	•	•	•	•	•	•	•	•	•	•	•	•										
40	•	•	•	•	•	•	•	•	•	•	•	•	•									
50	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
63			•	•	•	•	•	•	•	•	•	•	•	•	•	•						
70			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					
80	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
100	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
120			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
125	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
140			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
150	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
160			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
180			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
200			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
250			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
300			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
350			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
400	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
450			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
500									•	•												

Ordering Code (example):

Precision flat and square bar steel, ~DIN 59350	=	2922.1730.
Width B	10 mm =	010.
Thickness S	10 mm =	010.
Length L	1000 mm =	1000
Order No	=	2922.1730. 010. 010. 1000


Precision flat and square bar steel with machining allowance, DIN 59350

Material:
1.0570 / St 52-3
Non-alloyed construction steel

2923.0570.



Execution:
Thickness precision ground, width ground or milled, length machined

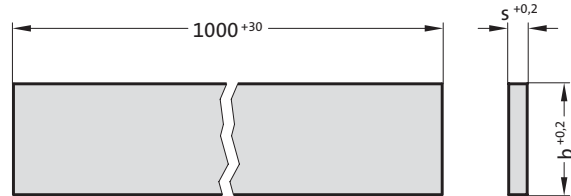

2923.0570. Precision flat and square bar steel with machining allowance, DIN 59350

s	5.2	6.2	8.2	10.4	12.4	15.4	20.4	25.4	30.4	40.4	50.4	60.4	70.4	80.4	100.4
10.4				●											
12.4					●										
15.4						●									
20.3		●	●	●	●	●									
20.4							●								
25.3	●	●	●	●	●	●	●								
25.4								●							
30.3	●	●	●	●	●	●	●	●							
30.4									●						
40.3	●	●	●	●	●	●	●	●	●						
40.4										●					
50.3	●	●	●	●	●	●	●	●	●	●					
50.4											●				
60.3	●	●	●	●	●	●	●	●	●	●	●				
60.4												●			
70.3				●	●	●	●	●	●	●	●	●			
70.4													●		
80.3	●	●	●	●	●	●	●	●	●	●	●	●	●		
80.4														●	
100.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
100.4															●
120.3			●	●	●	●	●	●	●	●	●	●	●	●	●
125.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
140.3			●	●	●	●	●	●	●	●	●	●	●	●	●
150.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
160.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
180.3			●	●	●	●	●	●	●	●	●	●	●	●	●
200.3		●	●	●	●	●	●	●	●	●	●	●	●	●	●
250.3		●	●	●	●	●	●	●	●	●	●	●	●	●	●
300.3			●	●	●	●	●	●	●	●	●	●	●	●	●
350.3				●	●	●	●	●	●	●	●	●	●	●	●
400.3				●	●	●	●	●	●	●	●	●	●	●	●

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	= 2923.0570.
Width B	10.4 mm = 010.
Thickness S	10.4 mm = 010.
Length L	1000 mm = 1000
Order No	= 2923.0570. 010.010.1000

Precision flat and square bar steel with machining allowance, DIN 59350

2923.2099.




Material:

1.2099 / X5 CrS 12
Stainless steel for plastic moulding,
tempered to 900-1050 N/mm²

Execution:

Thickness precision ground, width ground or milled, length machined

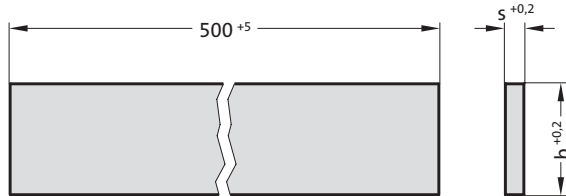

2923.2099. Precision flat and square bar steel with machining allowance, DIN 59350

s	6.2	8.2	10.4	15.4	20.4	25.4	30.4	40.4	50.4
b									
20.3	●	●	●						
25.3	●	●	●	●					
30.3	●	●	●	●	●				
40.3	●	●	●	●	●	●			
50.3	●	●	●	●	●	●	●		
60.3	●	●	●	●	●	●	●	●	
80.3	●	●	●	●	●	●	●	●	●
100.3	●	●	●	●	●	●	●	●	●
125.3	●	●	●	●	●	●	●	●	●
150.3	●	●	●	●	●	●	●	●	●
200.3	●	●	●	●	●	●	●	●	●
250.3	●	●	●	●	●	●	●	●	●
300.3	●	●	●	●	●	●	●	●	●

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	=	2923.2099.
Width B	20.3 mm =	020.
Thickness S	6.2 mm =	006.
Length L	500 mm =	0500
Order No	=	2923.2099. 020. 006. 0500


Precision flat and square bar steel with machining allowance, DIN 59350

Material:
1.2162 / 21 MnCr 5
Case hardened steel

2923.2162.



Execution:
Thickness precision ground, width ground or milled, length machined

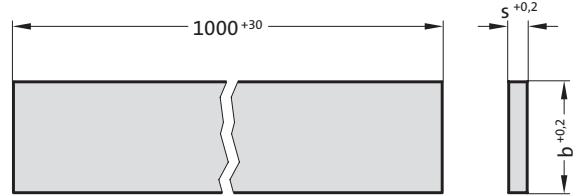

2923.2162. Precision flat and square bar steel with machining allowance, DIN 59350

s	8.2	10.4	12.4	15.4	20.4	25.4	30.4	40.4	50.4	60.4	80.4
b											
20.3	●	●	●	●							
20.4					●						
25.3	●	●	●	●	●						
25.4						●					
30.3	●	●	●	●	●	●					
30.4							●				
40.3	●	●	●	●	●	●	●				
40.4								●			
50.3	●	●	●	●	●	●	●	●			
50.4									●		
60.3	●	●	●	●	●	●	●	●	●		
60.4										●	
70.3	●	●	●	●	●	●	●	●	●	●	
80.3	●	●	●	●	●	●	●	●	●	●	●
80.4											●
100.3	●	●	●	●	●	●	●	●	●	●	
150.3	●	●	●	●	●	●	●	●	●	●	●
200.3	●	●	●	●	●	●	●	●	●	●	●
250.3	●	●	●	●	●	●	●	●	●	●	●
300.3	●	●	●	●	●	●	●	●	●	●	●

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	= 2923.2162.
Width B	20.4 mm = 020.
Thickness S	20.4 mm = 020.
Length L	1000 mm = 1000
Order No	= 2923.2162. 020. 020. 1000

Precision flat and square bar steel with machining allowance, DIN 59350

2923.2312.




Material:

1.2312 / 40 CrMnMoS 8-6
Steel for plastic moulding, pre-tempered to 900-1050 N/mm²

Execution:

Thickness precision ground, width ground or milled, length machined

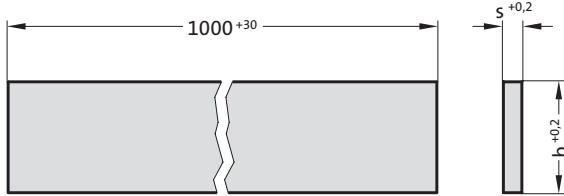

2923.2312. Precision flat and square bar steel with machining allowance, DIN 59350

s	4.2	5.2	6.2	8.2	10.4	12.4	15.4	16.4	20.4	25.4	30.4	32.4	40.4	50.4	60.4	70.4	80.4	90.4	100.4	
12.4						●														
15.4							●													
16.4								●												
20.3				●	●	●	●													
20.4									●											
25.3				●	●	●	●	●	●											
25.4										●										
30.3				●	●	●	●	●	●	●										
30.4											●									
32.3					●	●		●	●											
32.4												●								
40.3	●	●	●	●	●	●	●	●	●	●	●									
40.4													●							
50.3	●	●	●	●	●	●	●	●	●	●	●	●	●							
50.4														●						
60.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
60.4															●					
63.3	●	●	●	●	●	●		●	●	●	●	●	●	●	●					
70.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
70.4																●				
80.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
80.4																	●			
100.3	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
100.4																				●
125.3				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
150.3				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
200.3				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
220.3					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
250.3					●	●	●		●	●	●	●	●	●	●	●	●	●	●	●
300.3					●	●			●	●	●		●	●	●	●	●	●	●	●

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	=	2923.2312.
Width B	12.4 mm =	012.
Thickness S	12.4 mm =	012.
Length L	1000 mm =	1000
Order No	=	2923.2312. 012.012.1000

Precision flat and square bar steel with machining allowance, DIN 59350

Material:

1.2343 / X 37 CrMoV 5-1
Hot work steel

2923.2343.




Execution:

Thickness precision ground, width ground or milled, length machined

Note:

- = available in 500 mm and 1000 mm lengths
- = only available in 500 mm lengths
- = only available in 1000 mm lengths

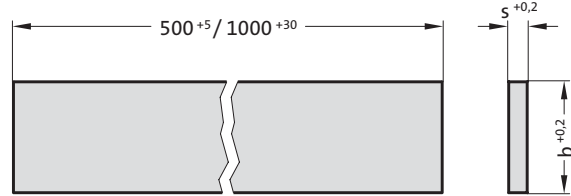

2923.2343. Precision flat and square bar steel with machining allowance, DIN 59350

s	4.2	5.2	6.2	8.2	10.4	12.4	15.4	16.4	20.4	25.4	30.4	32.4	40.4	50.4	60.4	80.4	100.4
10.3	○	○	○	○													
10.4					○												
12.4						○											
15.3	○	○	○	○	○	○											
15.4									○								
20.3	○	○	○	●	●	●	●	■		●							
20.4										●							
25.3	○	○	○	●	●	●	●	■	●								
25.4										●							
30.3	○	○	○	●	●	●	●		●	●							
30.4											●						
32.3								■									
40.3	○	○	○	●	●	●	●	■	●	●	●	■					
40.4													●				
50.3	○	○	○	●	●	●	●	■	●	●	●	■	●				
50.4														●			
60.3	○	○	○	●	●	●	●		●	●	●		●	●			
60.4															●		
63.3								■				■					
80.3	○	○	○	●	●	●	●	■	●	●	●	■	●	●	■		
80.4																■	
100.3	○	○	○	●	●	●	●	■	●	●	●	■	●	●	■	■	
100.4																	■
125.3				■	■	■	■	■	●	●	●	■	●	●	■	■	■
150.3				■	■	■	■	■	●	●	●	■	●	●	■	■	■
200.3				■	■	■	■	■	●	●	●	■	●	●	■	■	■

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	= 2923.2343.
Width B	10.4 mm = 010.
Thickness S	10.4 mm = 010.
Length L	500 mm = 0500
Order No	= 2923.2343. 010. 010. 0500


Precision flat and square bar steel with machining allowance, DIN 59350

2923.2363.



Material:
1.2363 / X 100 CrMoV 5-1
Cold worked steel

Execution:
Thickness precision ground, width ground or milled, length machined

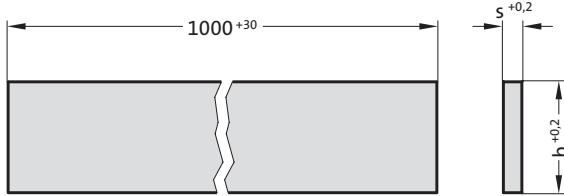

2923.2363. Precision flat and square bar steel with machining allowance, DIN 59350

s	8.2	10.4	12.4	15.4	20.4	25.4	30.4	40.4	50.4	60.4	80.4	100.4
b												
20.4					●							
25.3	●	●	●									
25.4						●						
30.3	●	●	●	●	●							
30.4							●					
40.3	●	●	●	●	●	●	●					
40.4								●				
50.3	●	●	●	●	●	●	●					
50.4									●			
60.3	●	●	●	●	●	●	●	●				
60.4										●		
80.3	●	●	●	●	●	●	●	●				
80.4											●	
100.3	●	●	●	●	●	●	●	●				
100.4												●
125.3		●	●	●	●	●	●	●				
150.3		●	●	●	●	●	●	●				
200.3		●	●	●	●	●	●	●				
250.3					●	●	●	●				

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	=	2923.2363.
Width B	20.4 mm =	020.
Thickness S	20.4 mm =	020.
Length L	1000 mm =	1000
Order No	=	2923.2363. 020. 020. 1000

Precision flat and square bar steel with machining allowance, DIN 59350


Material:
1.2379 / X 155 CrVMo 12-1
Cold worked steel

2923.2379.



Execution:
Thickness precision ground, width ground or milled, length machined

Note:
● = available in 500 mm and 1000 mm lengths
○ = only available in 500 mm lengths
■ = only available in 1000 mm lengths

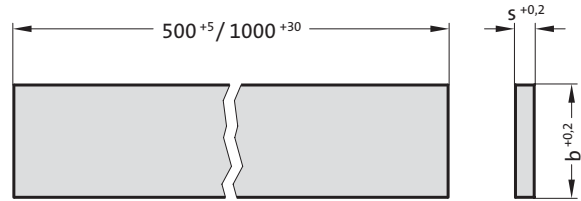

2923.2379. Precision flat and square bar steel with machining allowance, DIN 59350

s	2.2	3.2	4.2	5.2	6.2	8.2	10.4	12.4	15.4	16.4	20.4	25.4	30.4	32.4	40.4	50.4	60.4	63.4	70.4	80.4	100.4	120.4	150.4	
6.2					○																			
8.2						●																		
10.3	●	●	●	●	●	●																		
10.4							●																	
12.4								●																
15.3	●	●	●	●	●	●	●	■																
15.4									●															
16.4										■														
20.3	●	●	●	●	●	●	●	●	●	■														
20.4											●													
25.3	●	●	●	●	●	●	●	●	●	■	●													
25.4												●												
30.3	●	●	●	●	●	●	●	●	●	■	●	●												
30.4												●												
32.3								■	■	■	■	■	■											
32.4														■										
40.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■										
40.4															●									
50.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●									
50.4																●								
60.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●								
60.4																	■							
63.3								■	■	■	■	■	■	■	■	■	■							
63.4																								■
70.3	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■						
70.4																								■
80.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●	■							
80.4																								■
90.3								■	■	■	■	■	■	■	■	■	■	■	■					
100.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●	■	■	■					
100.4																								■
120.4																								■
125.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●	■	■	■					
150.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●	■	■	■					
150.4																								■
160.3								■	■	■	■	■	■	■	■	■	■	■	■					
200.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●	■	■	■					
250.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●	■	■	■					
300.3	●	●	●	●	●	●	●	●	●	■	●	●	●	■	●	●	■	■	■					
350.3										■	■	■	■	■	■	■	■	■	■					
400.3										■	■	■	■	■	■	■	■	■	■					

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	= 2923.2379.
Width B	6.2 mm = 006.
Thickness S	6.2 mm = 006.
Length L	500 mm = 0500
Order No	= 2923.2379. 006. 006. 0500

Precision flat and square bar steel with machining allowance, DIN 59350


2923.2436.



Material:
1.2436 / X 210 CrW 12
Cold worked steel

Execution:
Thickness precision ground, width ground or milled, length machined

Note:
● = available in 500 mm and 1000 mm lengths
○ = only available in 500 mm lengths
■ = only available in 1000 mm lengths

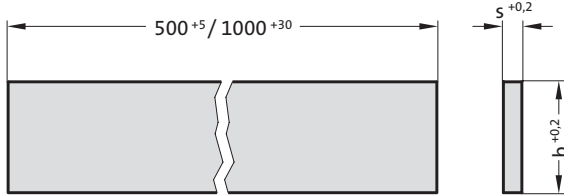

2923.2436. Precision flat and square bar steel with machining allowance, DIN 59350

s	2.2	3.2	4.2	5.2	6.2	8.2	10.4	12.4	15.4	20.4	25.4	30.4	40.4	50.4
b														
8.2						○								
10.3	○	●	●	●	●	●								
10.4							●							
12.4								●						
15.3	○	●	●	●	●	●	●	○						
15.4									○					
20.3	○	●	●	●	●	●	●	●	●					
20.4										●				
25.3	○	●	●	●	●	●	●	●	●	●				
25.4											●			
30.3	○	●	●	●	●	●	●	●	●	●	●			
30.4												●		
40.3	○	●	●	●	●	●	●	●	●	●	●	●		
40.4													●	
50.3	○	●	●	●	●	●	●	●	●	●	●	●	○	
50.4														■
60.3	○	●	●	●	●	●	●	●	●	●	●	●	○	
80.3	○	●	●	●	●	●	●	●	●	●	●	●	●	
100.3	○	●	●	●	●	●	●	●	●	●	●	●	●	■
125.3	○	○	○	○	○	○	○	○	○	○	○	○	○	■
150.3	○	○	○	○	○	○	○	○	○	○	○	○	○	■
200.3	○	○	○	○	○	○	○	○	○	○	○	○	○	■
250.3	○	○	○	○	○	○	○	○	○	○	○	○	○	■
300.3	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	= 2923.2436.
Width B	8.2 mm = 008.
Thickness S	8.2 mm = 008.
Length L	500 mm = 0500
Order No	= 2923.2436. 008. 008. 0500

Precision flat and square bar steel with machining allowance, DIN 59350

Material:

1.2767 / X 45 NiCrMo 4
Cold worked steel

2923.2767.




Execution:

Thickness precision ground, width ground or milled, length machined

Note:

- = available in 500 mm and 1000 mm lengths
- = only available in 500 mm lengths
- = only available in 1000 mm lengths

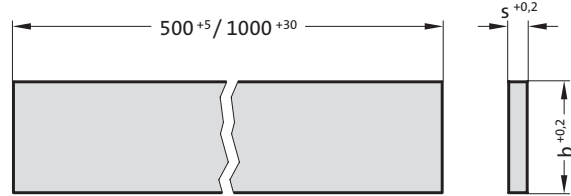

2923.2767. Precision flat and square bar steel with machining allowance, DIN 59350

s	4.2	5.2	6.2	8.2	10.4	12.4	15.4	16.4	20.4	25.4	30.4	32.4	40.4	50.4	60.4	80.4	100.4
10.3	○	○	○	○													
10.4					●												
12.4						●											
15.3	○	○	○	○	○	○											
15.4										○							
20.3	○	○	○	●	●	●	●	■		●							
20.4										●							
25.3	○	○	○	●	●	●	●	■	●								
25.4										●							
30.3	○	○	○	●	●	●	●		●	●							
30.4											●						
32.3								■	■	■							
40.3	○	○	○	●	●	●	●	■	●	●	●	■					
40.4													●				
50.3	○	○	○	●	●	●	●	■	●	●	●	■	●				
50.4														●			
60.3	○	○	○	●	●	●	●		●	●	●		●	●			
60.4															■		
63.3								■	■	■		■	■	■			
70.3				■	■	■			■	■	■	■	■	■			
80.3	○	○	○	●	●	●	●	■	●	●	●	■	●	●	■		
80.4																■	
100.3	○	○	○	●	●	●	●	■	●	●	●	■	●	●	■	■	
100.4																	■
125.3				●	●	●	●	■	●	●	●	■	●	●	■	■	■
150.3				■	■	■	■	■	■	■	■	■	■	■	■	■	■
200.3				■	■	■	■		■	■	■	■	■	■	■	■	■
250.3				■	■	■			■	■	■	■	■	■	■	■	■
300.3				■	■	■			■	■			■	■			■

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	= 2923.2767.
Width B	10.4 mm = 010.
Thickness S	10.4 mm = 010.
Length L	500 mm = 0500
Order No	= 2923.2767. 010. 010. 0500

Precision flat and square bar steel, DIN 59350




2922.2842.



Material:
1.2842 / 90 MnCrV
Cold worked steel

Execution:
Thickness precision ground, width ground or milled, length machined

Note:
● = available in 500 mm and 1000 mm lengths
○ = only available in 500 mm lengths

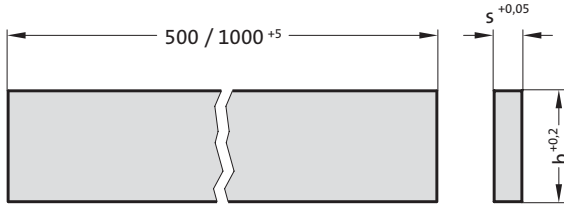

2922.2842. Precision flat and square bar steel, DIN 59350

s	1	2	3	4	5	6	8	10	12	15	16	20	25	30	40	50	60
b																	
4				○													
5					○												
6						●											
8							●										
10	○	●	●	●	●	●	●	●									
12	○	●	●	●	●	●	●	●	●								
15	○	●	●	●	●	●	●	●	●	●							
16											●						
20	○	●	●	●	●	●	●	●	●	●		●					
25	○	●	●	●	●	●	●	●	●	●		●	●				
30	○	●	●	●	●	●	●	●	●	●		●	●	●			
35	○	●	●	●	●	●	●	●	●	●		●	●	●			
40	○	●	●	●	●	●	●	●	●	●		●	●	●	●		
50	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	
60	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
70	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
80	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
100	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
120	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
125	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
150	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
160	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
180	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
200	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
250	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●
300	○	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●

Ordering Code (example):

Precision flat and square bar steel, DIN 59350	= 2922.2842.
Width B	4 mm = 004.
Thickness S	4 mm = 004.
Length L	500 mm = 0500
Order No	= 2922.2842. 004. 004. 0500

Precision flat and square bar steel with machining allowance, DIN 59350


Material:
1.2842 / 90 MnCrV
Cold worked steel

2923.2842.



Execution:
Thickness precision ground, width ground or milled, length machined

Note:
● = available in 500 mm and 1000 mm lengths
■ = only available in 1000 mm lengths

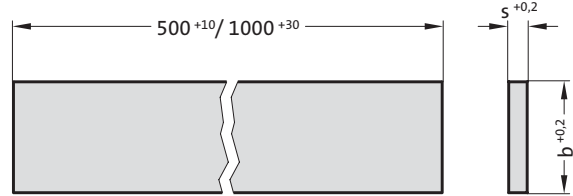

2923.2842. Precision flat and square bar steel with machining allowance, DIN 59350

s	2.2	3.2	4.2	5.2	6.2	8.2	10.4	12.4	15.4	16.4	20.4	25.4	30.4	32.4	40.4	50.4	60.4	80.4	100.4
10.3	■	■	■	■	■	■													
10.4							●												
12.4								●											
15.3	■	■	■	■	■	■	■	■											
16.4										■									
20.3	■	■	●	●	●	●	●	●	●	■									
20.4											●								
25.3	■	■	●	●	●	●	●	●	●	■	●								
25.4												●							
30.3	■	■	●	●	●	●	●	●	●	■	●	●							
30.4													●						
32.3			■	■	■	■	■	■	■	■	■	■							
32.4														■					
40.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■					
40.4															●				
50.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●				
50.4																●			
60.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●			
60.4																	●		
63.3			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
70.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●			
80.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●			
80.4																		●	
100.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●		●	
100.4																			●
120.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●	●	●	●
125.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●	●	●	●
150.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●	●	●	●
160.3			●	●	●	●	●	●	●	■	●	●	●	■	●	●	●	●	●
180.3			●	●	●	●	●	●	●	■	●	●	●	■	●	●	●	●	●
200.3	■	■	●	●	●	●	●	●	●	■	●	●	●	■	●	●	●	●	●
250.3																		●	●
300.3						●	●	●	●	■	●	●	●					●	●

Ordering Code (example):

Precision flat and square bar steel with machining allowance, DIN 59350	= 2923.2842.
Width B	10.4 mm = 010.
Thickness S	10.4 mm = 010.
Length L	500 mm = 0500
Order No	= 2923.2842. 010.010.0500



Precision feeler gauge Foil shim



Typical Applications:

- Tolerance measurement of internal and external dimensions.
- Adjustment of tooling devices and machine parts.
- Testing valve and cylinder clearances.

Material:

C-Steel, Material-No.: 1.1274
Stainless steel, Material-No.: 1.4310

2925. Precision feeler gauge, Foil shim

	Precision feeler gauge Contents per can/spool						Foil shims Contents: foil shims per pack			Technical specifications tensile strength N/mm ²		
	5 m	10 m	5 m	5 m	5 m	5 m	10	5	5	Tolerance ± mm	for carbon steel	for stainless steel
Width mm ▶	12,7	12,7	6	25	50	100	Format 50×300 mm	Format 100×500 mm	Format 150×500 mm			
Thickness mm ▼												
0,005	▲	▲	–	–	–	▲	–	▲	–	0,001	–	>1500
0,01	▲	▲	–	▲	▲	▲	▲	▲	–	0,002	–	>1500
0,02	◆	◆	–	▲	▲	▲	▲	▲	–	0,002	2000–2200	>1500
0,03	◆	◆	–	◆	◆	▲	◆	▲	–	0,002	2000–2200	1500–1700
0,04	◆	◆	–	◆	◆	▲	◆	▲	–	0,003	2000–2200	1500–1700
0,05	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,003	2000–2200	1500–1700
0,06	◆	◆	–	◆	◆	▲	◆	▲	–	0,003	2000–2200	1500–1700
0,07	◆	◆	–	◆	◆	▲	◆	▲	–	0,004	2000–2200	1500–1700
0,08	◆	◆	◆	◆	◆	▲	◆	▲	–	0,004	2000–2200	1500–1700
0,09	◆	◆	–	◆	◆	▲	◆	▲	–	0,004	2000–2200	1500–1700
0,10	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,004	2000–2200	1500–1700
0,12	◆	◆	–	–	◆	▲	◆	▲	–	0,004	2000–2200	1500–1700
0,15	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,005	2000–2200	1500–1700
0,20	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,006	1800–2100	1500–1700
0,25	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,007	1800–2100	1500–1700
0,30	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,007	1800–2100	1500–1700
0,35	◆	◆	–	–	◆	▲	◆	▲	–	0,008	1800–2000	1500–1700
0,40	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,009	1600–1900	1500–1700
0,45	◆	◆	–	–	◆	▲	◆	▲	–	0,009	1600–1900	1500–1700
0,50	◆	◆	◆	◆	◆	▲	◆	▲	▲	0,010	1600–1900	1500–1700
0,55	◆	◆	–	–	–	▲	–	▲	–	0,010	1600–1900	1500–1700
0,60	◆	◆	–	◆	◆	▲	◆	▲	–	0,010	1600–1900	1500–1700
0,70	◆	◆	–	◆	◆	▲	◆	▲	–	0,012	1600–1900	1500–1700
0,80	◆	◆	–	◆	◆	▲	◆	▲	–	0,013	1600–1800	1500–1700
0,90	◆	◆	–	◆	◆	▲	◆	▲	–	0,013	1600–1800	1500–1700
1,00	◆	◆	–	◆	◆	▲	◆	▲	–	0,013	1600–1800	1500–1700

Order No. Part II = Material

- ◆ C-Steel, Material-No.: 1.1274 is 1
- ▲ Stainless steel, Material-No.: 1.4310 is 2

Ordering code (example):

Precision feeler gauge	=	2925.
Material-No.: 1.1274	=	1.
Thickness 0,07 mm	=	0070.
Width 12,7 mm	=	0012.
Length 10 m	=	10000
Order No	=	2925.1.0070.0012.10000

Ordering code (example):

Foil shim	=	2925.
Material-No.: 1.4310	=	2.
Thickness 0,02 mm	=	0020.
Width 50 mm	=	050.
Length 300 mm	=	300
Order No	=	2925.2.0020.050.300